

SELECT MODEL

| | | | | |
|------------------------------|------------------|--|-----|------------------|
| 1 Series | CZ 400DGC | | | |
| 2 Type | G | Gauge | | |
| 3 Body material | A | Aluminum | | |
| | S | SS-316 | | |
| 4 Dial size | 3.5 | 3.5" (80 mm) | 4.5 | 4.5" (115 mm) |
| | 4.0 | 4.0" (100mm) | 6.0 | 6.0" (150 mm) |
| 5 Connection | 4N | 1/4" NPT (F) (Std.) | 4B | 1/4" BSP (F) |
| | ZZ | Special connection sizes using adaptor | | |
| 6 Porting | 1 | In-line (Std.) | 5 | In-line & vent |
| | 2 | Rear / Back | 6 | In-line & bottom |
| | 3 | Bottom | 8 | In-line & back |
| | 4 | Bottom & vent | | |
| 7 Case | S4 | SS 304 (Std.) | S6 | SS 316 |
| | F4 | SS 304 flange | | |
| | EP | Engineering polymer (available in 4.5", 6.0" only) | | |
| | BF | Bayonet (available in 4.0" safety glass only) | | |
| 8 Window | F | Glass (Std.) | A | Acrylic |
| | T | Toughened glass | L | Safety glass |
| 9 Seals/Diaphragm | B | Buna-N (Std.) | E | EPDM |
| | V | Viton | | |
| 10 Switch (See Notes) | 0 | None | | |

Advantages :

Instrument automatically resets after line surges and cold start.
This eliminates balancing of differential pressure instrument after such events.

Notes

- For SS 316 case, please contact factory (MOQ applies).
- For Gauge + switch, please contact factory.
- Mounting bracket: Aluminum (Standard) ; SS (Optional)

11 Range Standard ranges: (Other ranges & units on request)


| | | | | |
|---------|-----|------|-----|-----|
| mm H2O | 50 | 125 | 250 | 600 |
| In. H2O | 2 | 5 | 10 | 25 |
| mbar | 5 | - | 25 | 60 |
| kPa | 0.5 | 1.25 | 2.5 | 6 |

12 Options

| | |
|----|-------------------------------------|
| 0 | None |
| A | Glycerine* |
| C | Customer Logo |
| D | Dual scale |
| E | Colour band |
| F | Filter mesh in (+) connection |
| N | NACE |
| S | Silicone oil* |
| I | Oxygen service (Contact factory) |
| M1 | 2" horizontal pipe mounting bracket |
| M2 | Surface mounting bracket |
| M3 | 2" vertical pipe mounting bracket |

* Affects accuracy

Ordering code sequence

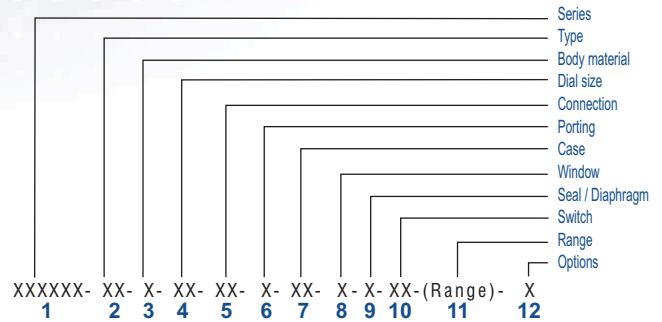

Contact factory for special execution.