

SELECT MODEL

1 Series	PR 10	
2 Type	GS Gauge + Switch	S Switch
3 Body material	S SS-316 (in aluminum enclosure)	
4 Dial size	4.5 4.5" (115 mm)	6.0 6.0" (150 mm)
5 Connection	4N 1/4" NPT (F) (Std.)	4B 1/4" BSP (F)
6 Porting	1 In-line	
7 Case	S4 SS 304 (Std.)	S6 SS 316
8 Window	F Glass (Std.)	L Safety glass
	T Toughened glass	
9 Seals/Diaphragm	B Buna-N (Std.)	E EPDM
	V Viton	
10 Switch	Select option & specification	

Advantages :

Instrument automatically resets after line surges and cold start. This eliminates balancing of differential pressure instrument after such events.

Notes

- This gauge is Ex d IIC T6 IP66 approved.
- For SS 316 case, please contact factory (MOQ applies).
- Switch adjustment range between 30-100% of full scale deflection (FSD). For specific details, please contact factory.
- Mounting bracket: Aluminum (Standard) ; SS (Optional)

0	None
2	One SPST, with a terminal strip
4	Two SPSTs, with a terminal strip

+

SPST Specifications (AC/DC max)

1 Standard	2	3	4
10 VA	40 VA	100 VA	60 VA
100 V	230 V	300 V	240 V
0.5 Amp	1 Amp	1 Amp	3 Amp
Adjustable	Adjustable	Adjustable	Adjustable

6	One SPDT, with a terminal strip
8	Two SPDTs, with a terminal strip

+

SPDT Specifications (AC/DC max)

1 Standard	2	3
3 VA	5 VA	5 VA
30 V	125 V	175 V
0.3 Amp	0.25 Amp	0.25 Amp
Adjustable	Adjustable	Adjustable

Example: Switch selection 21 is 1 SPST with terminal strip with switch specifications 10VA, 100V, 0.5Amp

11 Range


Standard ranges : (Other ranges & units on request)

Kg/cm²	0.25	-	0.5	0.75	1	-	1.6	2	2.5	3	3.5	4	5	-	6	7	9	10
bar	0.25	-	0.5	0.75	1	-	1.6	2	2.5	3	3.5	4	5	-	6	7	9	10
mbar	250	-	500	750	1000	-	-	-	-	-	-	-	-	-	-	-	-	-
psi	-	5	8	-	15	20	25	30	-	40	50	60	-	80	-	100	-	-
kPa	25	-	50	75	100	-	160	200	250	300	350	400	500	-	600	700	900	1000

12 Options

O	None
C	Customer Logo
D	Dual scale
E	Colour band
F	Filter mesh in (+) connection
H	Descending calibration (long delivery time)
N	NACE
I	Oxygen service (Contact factory)
M1	2" horizontal pipe mounting bracket (In Aluminum)
M3	2" vertical pipe mounting bracket (In Aluminum)

Ordering code sequence

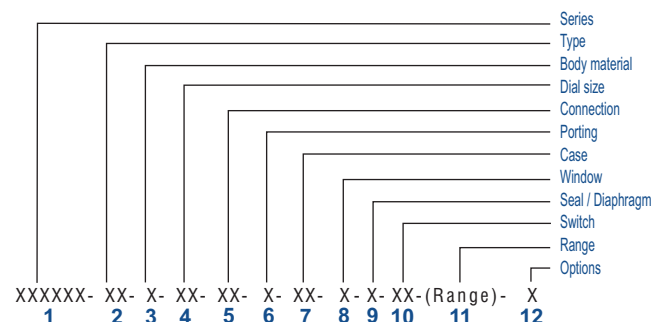

Contact factory for special execution.